


PUK electrodes  
WLa

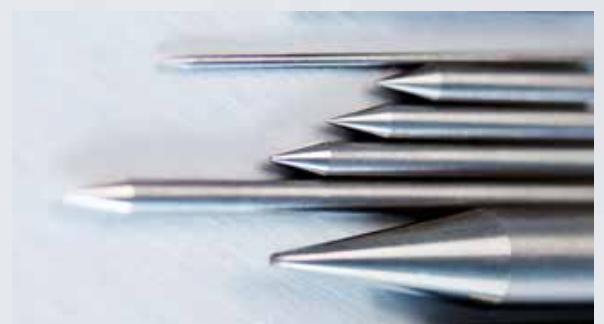

## Our „classic“ for PUK welding – the „WLa“ tungsten electrode.

Due to the good service life and equally good strike characteristics, for many years now we have been using tungsten electrodes, which contain not only a range of mixed oxides but also an increased portion of lanthanum oxide (La<sub>2</sub>O<sub>3</sub>).

The electrodes are highly suitable for universal use and are very well-suited for welding unalloyed and high-alloyed steels, as well as titanium, nickel, copper, tin and precious metal alloys.

These „WLa“ electrodes have proven themselves for PUK welding and also deliver outstanding value for money.

WLa electrodes are available in three different diameters:

Ø 0.6 mm x 50 mm

Art. no. 100 411

10 electrodes (single side ground).

The proven benchmark for everyday tasks in production.

Particularly well suited for low and moderate welding power.

(collet item no. 100 151 required)

Ø 0.8 mm x 50 mm

Art. no. 100 413

10 electrodes (single side ground).

Universally applicable for fine work and for welding with higher power.

(collet item no. 100 157 required)

Ø 1.0 mm x 50 mm

Art. no. 100 417

10 electrodes (single side ground).

Particularly well suited for welding with high power. Lowest electrode resistance, meaning the greatest power transfer.

(collet item no. 100 158 required)



Further information about our  
welding equipment as well as  
components and accessories  
can be found on our website:  
[www.lampert.info](http://www.lampert.info)



[www.lampert.info](http://www.lampert.info)